


STANDARD PROBE

- Compliant with UNI EN ISO 16911-1 and UNI EN 13284-1
- Designed in stainless steel



- Developed to perform isokinetic samplings in stacks without or with little humidity
- Completely disassembled for easy transport

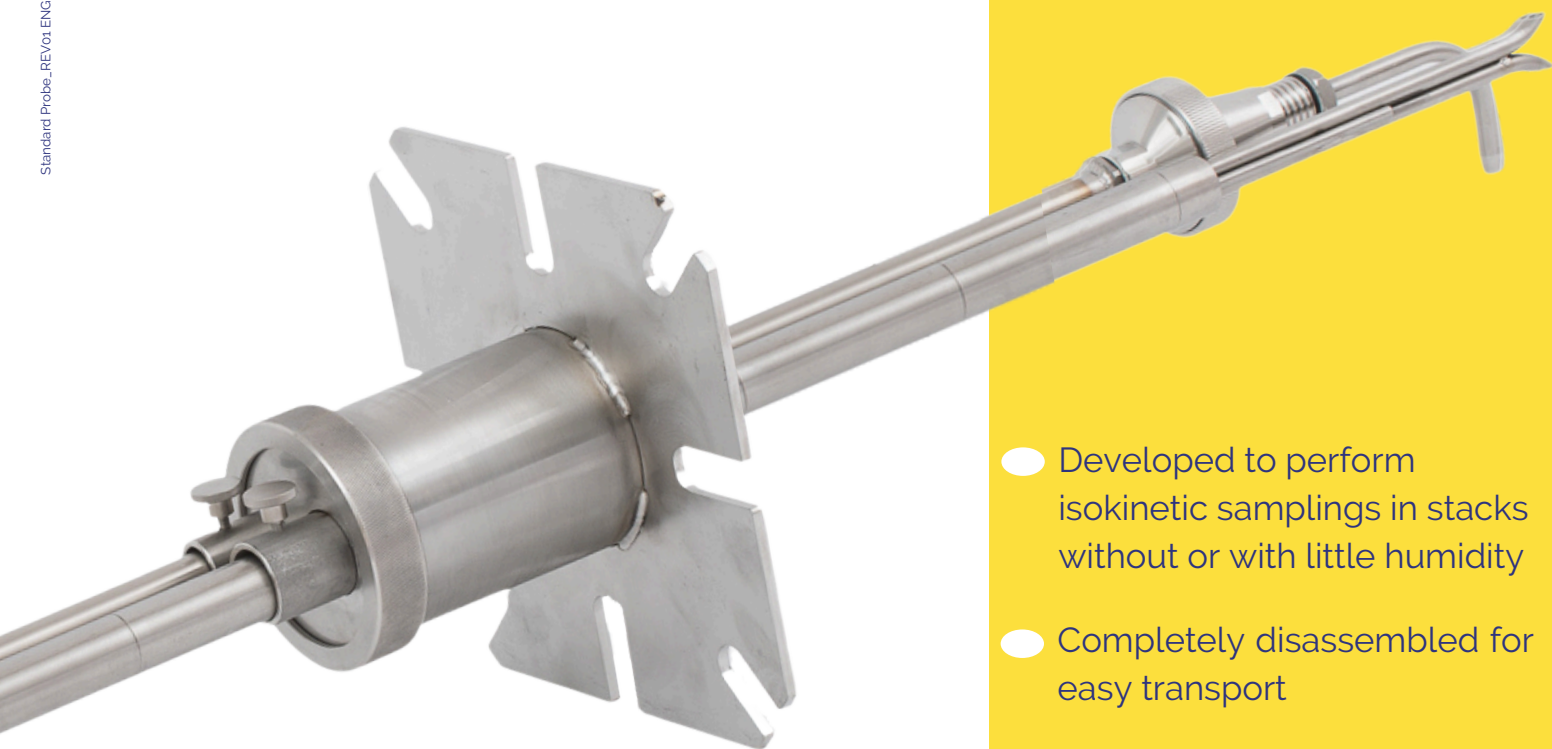

STANDARD PROBE

The **STANDARD PROBE** integrates a measuring tube (Darcy with thermocouple) and sampling tube with nozzles and filter holders, which are connected to a sliding device and fastened to the duct.

This enables isokinetic sampling of emission dust found in chimneys with little or no condensation.

All components are made of stainless steel and are compliant with **UNI EN ISO 16911-1** and **UNI EN 13284-1**.

The assembled probe may be used in ducts with a minimum aperture of 80 mm diameter or larger.

The sliding device, once attached to the chimney, allows the tubes to move in parallel for automatic isokinetic sampling.

The probes can be completely dismantled to facilitate transport and allow the measuring tube to be used independently of the sampling tube in small chimneys.

TECHNICAL FEATURES

- Maximum operating temperature 600 °C.
- Available in various lengths: 500 mm - 1000 mm - 1500 mm - 2000 mm - 2500 mm - 3000 mm.

TECHNICAL SPECIFICATIONS

• NOMINAL LENGHT (mm)	• L WITH SLIDER (mm)
500	315
1000	815
1500	1315
2000	1815
2500	2315
3000	2815

STANDARD PROBE

